

# World Housing Encyclopedia

*A Resource on Construction in Earthquake Regions*



an initiative of  
Earthquake Engineering Research Institute (EERI) and  
International Association for Earthquake Engineering (IAEE)

---

## HOUSING REPORT

### **Confined block masonry house**

---

<b>Report#</b>	1
<b>Last Updated</b>	
<b>Country</b>	Argentina
<b>Author(s)</b>	Virginia I Rodriguez, Maria I Yacante, Sergio Reiloba,
<b>Reviewers</b>	Sergio Alcocer,

---

### **Important**

This encyclopedia contains information contributed by various earthquake engineering professionals around the world. All opinions, findings, conclusions & recommendations expressed herein are those of the various participants, and do not necessarily reflect the views of the Earthquake Engineering Research Institute, the International Association for Earthquake Engineering, the Engineering Information Foundation, John



## **General Information**

<b>Building Type:</b>	Confined block masonry house
<b>Country:</b>	Argentina
<b>Author(s):</b>	Virginia I Rodriguez Maria I Yacante Sergio Reiloba
<b>Last Updated:</b>	
<b>Regions Where Found:</b>	Buildings of this construction type can be found in San Juan Capital City and the surroundings. This type of housing construction is commonly found in urban areas.
<b>Summary:</b>	This is typically a one-or-two-story residential building, of detached or semi-detached construction, generally found in the urban areas of San Juan and Mendoza and less frequently in the rural areas. The walls are made of concrete block masonry with reinforced concrete columns and beams that tie the walls together and provide the strength for the building. One of the main structural deficiencies for this construction type lies in the widely different wall densities in the two orthogonal directions. This deficiency may be eliminated with appropriate architectural design. This construction type is otherwise expected to demonstrate good seismic performance.
<b>Length of time practiced:</b>	25-60 years
<b>Still Practiced:</b>	Yes
<b>In practice as of:</b>	
<b>Building Occupancy:</b>	Single dwelling
<b>Typical number of stories:</b>	1 or 2
<b>Terrain-Flat:</b>	Typically
<b>Terrain-Sloped:</b>	3
<b>Comments:</b>	This construction practice has been followed for 30 years.

## Features


<b>Plan Shape</b>	Rectangular, solid
<b>Additional comments on plan shape</b>	The typical shape of a building plan for this housing type is rectangular.
<b>Typical plan length (meters)</b>	10
<b>Typical plan width (meters)</b>	6.5
<b>Typical story height (meters)</b>	3.3
<b>Type of Structural System</b>	Other
<b>Additional comments on structural system</b>	The vertical load-resisting system is confined masonry wall system. It consists of concrete block masonry walls with reinforced concrete beams and columns. In some cases, concrete beams and columns are provided without the masonry walls, in which case this system behaves as a frame; this depends on the architectural design. The lateral load-resisting system is confined masonry wall system. It consists of concrete block masonry walls with reinforced concrete beams and columns.
<b>Gravity load-bearing &amp; lateral load-resisting systems</b>	Masonry: Clay/concrete: confined brick/block masonry with concrete posts/tie columns and beams
<b>Typical wall densities in direction 1</b>	1-2%
<b>Typical wall densities in direction 2</b>	5-10%
<b>Additional comments on typical wall densities</b>	The typical structural wall density is up to 10 %. The total wall density is 0.116; it is 0.03 in the X-direction, and 0.08 in the Y-direction.
<b>Wall Openings</b>	The typical house has approximately seven openings, with an average area of 2.50 m <sup>2</sup> . The position of the openings differs from building to building, however generally there is a front door and a back or side door. There are windows in the family room, in every bedroom and the bathroom. The opening area is about 13% of the overall wall area.
<b>Is it typical for buildings of this type to have</b>	

<b>Of this type to have common walls with adjacent buildings?</b>	No
<b>Modifications of buildings</b>	This building type hasn't many modifications else.
<b>Type of Foundation</b>	Shallow Foundation: Reinforced concrete strip footing
<b>Additional comments on foundation</b>	
<b>Type of Floor System</b>	Other floor system
<b>Additional comments on floor system</b>	The flooring system is a nervure slab made of concrete with hollow clay blocks and fill-in elements.
<b>Type of Roof System</b>	Roof system, other
<b>Additional comments on roof system</b>	The roofing system is nervure slab made of concrete with hollow clay blocks and fill-in elements. It is considered to be a rigid diaphragm.
<b>Additional comments section 2</b>	When separated from adjacent buildings, the typical distance from a neighboring building is 5 meters.

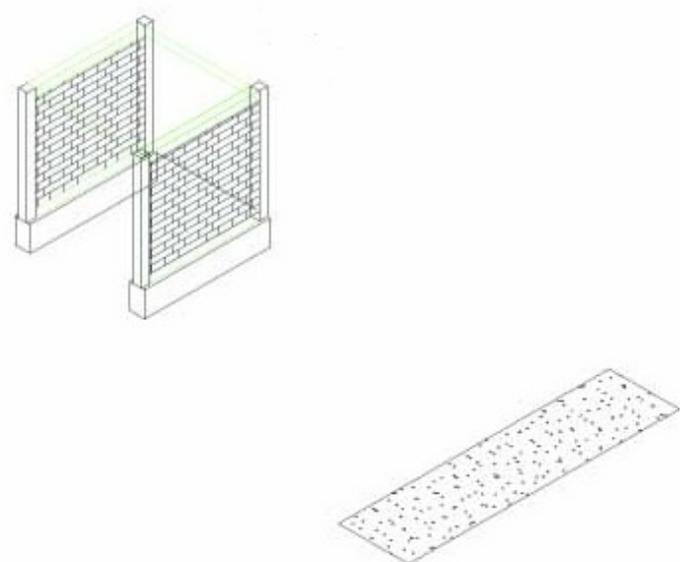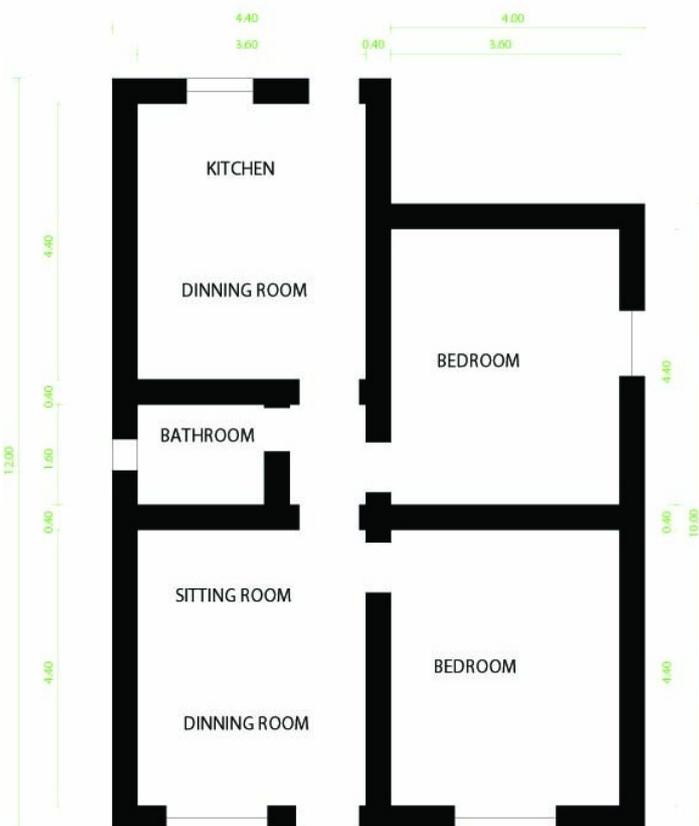

**Key load-bearing elements**

**Plan of a typical building**

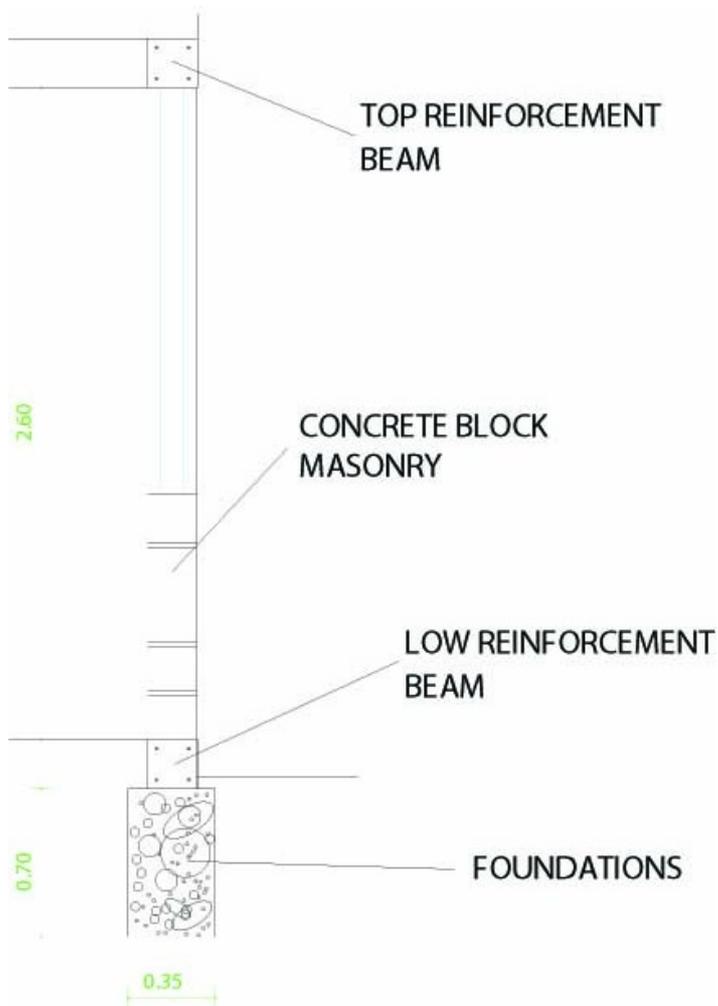

***Critical structural details***

**Building Materials and Construction Process**

**Description of Building Materials**

<b>Structural Element</b>	<b>Building Material (s)</b>	<b>Comment (s)</b>
Wall/Frame	Hollow concrete block	Compressive strength of the blocks varies from 2-50 kg/sq cm. The mix proportion used in making the mortars is 1:1:5 (cement-lime-sand). Wall thickness varies from 0.20 to 0.40 m. The walls have good resistance to compression and shear strength.
Foundations	Concrete	Compressive strength of the concrete used is 210 kg/sq cm. The mix proportion used in making

the concrete is 1:3:5 (cement-sand- pebble). The foundation under columns is of size 0.60 m x 0.25 m. The foundation has average resistance to compression.

Floors		
Roof	The roof is made of reinforced concrete hollow clay blocks.	The compressive strength of the concrete used is 210 - 420 kg/sq. cm. The mix proportion used in making the concrete is 1:2:4 (cement-sand-pebble).
Other	Beams and columns used for confining the masonry walls are made of reinforced concrete.	The compressive strength of the concrete used is 210 - 420 kg/sq. cm. The mix proportion used in making the concrete is 1:2:4 (cement-sand-pebble). The size of columns is 0.20 m x 0.20 m and that of beams is 0.20 m x 0.15 m.

## Design Process

<b>Who is involved with the design process?</b>	EngineerArchitect
<b>Roles of those involved in the design process</b>	Architects are in charge of the architectural design of the building and sometimes, the construction process. Engineers are in charge of the structural design and of the construction process in general.
<b>Expertise of those involved in the design process</b>	The professionals involved in the design and construction process -architects and engineers- have a good level of expertise and great experience in this type of construction, typical in San Juan.

## Construction Process

<b>Who typically builds this construction type?</b>	Other
<b>Roles of those involved in the building process</b>	The builder usually does not live in this construction type. It is designed and built by professionals and used in housing plans developed and financed by the state.

<b>Expertise of those involved in building process</b>	
<b>Construction process and phasing</b>	<p>The construction process is usually carried out by a construction company. It begins with the filling in of foundations, the assembling of the bottom reinforced concrete beams and columns and the casting of these beams. Then the block masonry walls are being built and the concrete columns are being cast. Subsequently, the top reinforced concrete beams are assembled and the slab concrete is poured. The tools and equipment typically used are. spatulas, shovels, hoes, baskets, saws, pliers, levels, cement mixers, etc. This type of construction is generally designed for its final constructed size, but usually the final size is fulfilled in a later stage, as an extension of the original construction. Sometimes the owner also builds additional parts, generally without any professional input.</p>
<b>Construction issues</b>	

## Building Codes and Standards

<b>Is this construction type address by codes/standards?</b>	Yes
<b>Applicable codes or standards</b>	Yes, the 1951 Building Code of the Province of San Juan, Earthquake-proof Norms Concar 70, Argentinean Earthquake-proof Norms 80 and 1990 INPRES CIRSOC Norms.
<b>Process for building code enforcement</b>	The provincial authorities approve the design and controls the construction process. To start the process of construction it is necessary to have the approval of the general and structure plans, the electrical wiring plans, plumbing, and gas plans. This approval is provided by the Provincial Authorities. A construction license provided by the Municipal Authorities is also required.

## Building Permits and Development Control Rules

<b>Are building permits required?</b>	Yes
<b>Is this typically informal construction?</b>	Yes
<b>Is this construction</b>	

**typically authorized as per development control rules?**

Yes

**Additional comments on building permits and development control rules**

## **Building Maintenance and Condition**

**Typical problems associated with this type of construction**

The only problems associated with this type of construction are the considerable dispersion in the quality of the concrete blocks used and the common lack of maintenance in this type of construction. The quality of the blocks is controlled by means of standardized trials.

**Who typically maintains buildings of this type?**

Owner(s)

**Additional comments on maintenance and building condition**

Usually, it is the owner who maintains the building, but little or no maintenance is done.

## **Construction Economics**

**Unit construction cost**

Unit construction cost per m<sup>2</sup> of built-up area is approx. US\$ 250. This price includes the entire needs of the construction.

**Labor requirements**

To start the process of construction it is necessary to have the approval of the general and structure plans, the electrical wiring plans, plumbing, and gas plans. This approval is provided by the Provincial Authorities. A construction license provided by the Municipal Authorities is also required. This type of building will need approx. 4 months to complete the construction. This type of building will need approx. 4 months to complete the construction. Workmen must satisfy minimum requirements like some expertise in the making of concrete, bond-beams, tie-columns, slabs cement mortars, and joists as well as in the construction of block masonry walls.

**Additional comments section 3**

## **Socio-Economic Issues**

<b>Patterns of occupancy</b>	A single family per housing unit.
<b>Number of inhabitants in a typical building of this construction type during the day</b>	<5
<b>Number of inhabitants in a typical building of this construction type during the evening/night</b>	<5
<b>Additional comments on number of inhabitants</b>	
<b>Economic level of inhabitants</b>	Middle-income class
<b>Additional comments on economic level of inhabitants</b>	Below are general guidelines related to the economic status of the inhabitants: Very Poor are lowest 10% of the population (per GDP), Poor from lowest 30% of the population, Middle Class from the lowest 30% up to the top 20% of the population, and Rich from top 20% of the population. For the Middle class, the price of the Housing Unit is 18,000 and their annual Income is 20,000. Ratio of housing unit price to annual income: 1:1 or better
<b>Typical Source of Financing</b>	Commercial banks/mortgages
<b>Additional comments on financing</b>	
<b>Type of Ownership</b>	Own with debt (mortgage or other)
<b>Additional comments on ownership</b>	
<b>Is earthquake insurance for this construction type typically available?</b>	No
<b>What does earthquake insurance typically cover/cost</b>	
<b>Are premium discounts or higher coverages available for seismically strengthened buildings or new buildings built to incorporate seismically resistant features?</b>	No

## Additional comments on premium discounts

### Additional comments section 4

## Earthquakes

### Past Earthquakes in the country which affected buildings of this type

Year	Earthquake Epicenter
1977	Caucete

### Past Earthquakes

<b>Damage patterns observed in past earthquakes for this construction type</b>	In the Capital city of San Juan, located about 100 km from the epicenter, the intensity was between VII and VIII. The buildings of this construction type sustained the earthquake without serious damage.
<b>Additional comments on earthquake damage patterns</b>	During the earthquake of 1977 in Caucete, in the capital city of San Juan, located about 100 km from the epicenter, the intensity was between VII and VIII. The buildings of this construction type sustained no serious damage.

### Structural and Architectural Features for Seismic Resistance

The main reference publication used in developing the statements used in this table is FEMA 310 "Handbook for the Seismic Evaluation of Buildings-A Pre-standard", Federal Emergency Management Agency, Washington, D.C., 1998.

The total width of door and window openings in a wall is: For brick masonry construction in cement mortar : less than  $\frac{1}{2}$  of the distance between the adjacent cross walls; For adobe masonry, stone masonry and brick masonry in mud mortar: less than  $\frac{1}{3}$  of the distance between the adjacent cross walls; For precast concrete wall structures: less than  $\frac{3}{4}$  of the length of a perimeter wall.

Structural/Architectural Feature	Statement	Seismic Resistance
Lateral load path	The structure contains a complete load path for	TRUE

	seismic force effects from any horizontal direction that serves to transfer inertial forces from the building to the foundation.	
Building Configuration-Vertical	The building is regular with regards to the elevation. (Specify in 5.4.1)	TRUE
Building Configuration-Horizontal	The building is regular with regards to the plan. (Specify in 5.4.2)	TRUE
Roof Construction	The roof diaphragm is considered to be rigid and it is expected that the roof structure will maintain its integrity, i.e. shape and form, during an earthquake of intensity expected in this area.	TRUE
Floor Construction	The floor diaphragm(s) are considered to be rigid and it is expected that the floor structure(s) will maintain its integrity during an earthquake of intensity expected in this area.	TRUE
Foundation Performance	There is no evidence of excessive foundation movement (e.g. settlement) that would affect the integrity or performance of the structure in an earthquake.	TRUE
Wall and Frame Structures-Redundancy	The number of lines of walls or frames in each principal direction is greater than or equal to 2.	TRUE
Wall Proportions	Height-to-thickness ratio of the shear walls at each floor level is: Less than 25 (concrete walls); Less than 30 (reinforced	TRUE

masonry walls); Less than 13 (unreinforced masonry walls);

Foundation-Wall Connection	Vertical load-bearing elements (columns, walls) are attached to the foundations; concrete columns and walls are doveled into the foundation.	TRUE
Wall-Roof Connections	Exterior walls are anchored for out-of-plane seismic effects at each diaphragm level with metal anchors or straps.	TRUE
Wall Openings		TRUE
Quality of Building Materials	Quality of building materials is considered to be adequate per the requirements of national codes and standards (an estimate).	TRUE
Quality of Workmanship	Quality of workmanship (based on visual inspection of a few typical buildings) is considered to be good (per local construction standards).	TRUE
Maintenance	Buildings of this type are generally well maintained and there are no visible signs of deterioration of building elements (concrete, steel, timber).	N/A

## Building Irregularities

<b>Additional comments on structural and architectural features for seismic resistance</b>	
<b>Vertical irregularities typically found in this</b>	Other

## construction type

<b>Horizontal irregularities typically found in this construction type</b>	Other
<b>Seismic deficiency in walls</b>	In general, this type of building has no seismic deficiencies, except when the construction is not controlled by an official organization.
<b>Earthquake-resilient features in walls</b>	
<b>Seismic deficiency in frames</b>	Generally without seismic deficiencies.
<b>Earthquake-resilient features in frame</b>	
<b>Seismic deficiency in roof and floors</b>	No seismic deficiencies.
<b>Earthquake resilient features in roof and floors</b>	
<b>Seismic deficiency in foundation</b>	
<b>Earthquake-resilient features in foundation</b>	

## Seismic Vulnerability Rating

For information about how seismic vulnerability ratings were selected see the [Seismic Vulnerability Guidelines](#)

	High vulnerability		Medium vulnerability		Low vulnerability	
	A	B	C	D	E	F
Seismic vulnerability class				-	o	-



***Photograph illustrating typical earthquake damage***

## **Retrofit Information**

### **Description of Seismic Strengthening Provisions**

<b>Structural Deficiency</b>	<b>Seismic Strengthening</b>
Wall	Increase the width of some walls. This has a low increase in the construction cost and a high likelihood of enhancing seismic stability. It is relatively simple to perform.
<b>Additional comments on seismic strengthening provisions</b>	
<b>Has seismic strengthening described</b>	

**in the above table been performed?**


**Was the work done as a mitigation effort on an undamaged building or as a repair following earthquake damages?**

**Was the construction inspected in the same manner as new construction?**

**Who performed the construction: a contractor or owner/user? Was an architect or engineer involved?**

**What has been the performance of retrofitted buildings of this type in subsequent earthquakes?**

**Additional comments section 6**

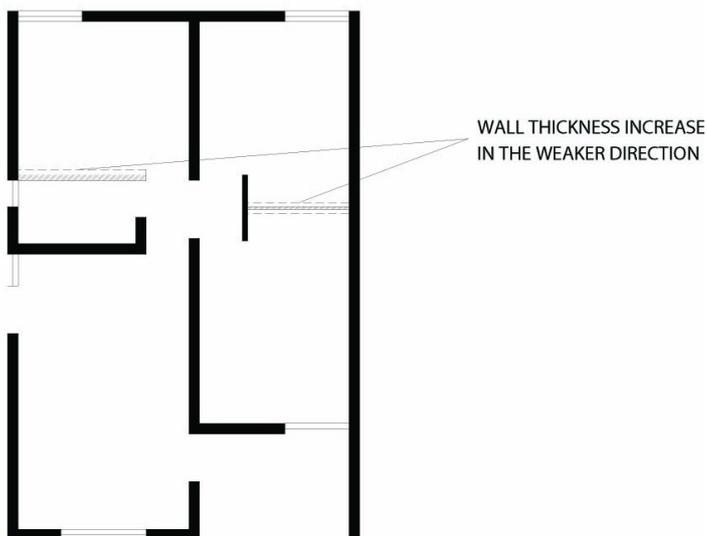

***Illustration of seismic strengthening techniques***

## **References**

## The 1951 Building Code of the Province of San Juan

Inter-relations between Architectural Design and Structural Design in High Seismic Risk Areas : Building Level - San Juan San Juan, Argentina 1989

Earthquake-proof Norms Concar 70

### **Authors**

<b>Name</b>	<b>Title</b>	<b>Affiliation</b>	<b>Location</b>	<b>Email</b>
Virginia I Rodriguez	Architect	Professor and Researcher	B# UDAP III M.EMblock 1 Piso 1# 5425 San Juan # Argentina	deskjet@impsat1.com.ar
Maria I Yacante	Architect	Professor and Researcher	Av. Libertador 1068 (s) 5400 San Juan # Argentina	
Sergio Reiloba	Architect	Professor and Researcher	Napole#n Borini 4955 (o) 5400 San Juan # Argentina	cereiloba@mixmail.com

### **Reviewers**

<b>Name</b>	<b>Title</b>	<b>Affiliation</b>	<b>Location</b>	<b>Email</b>
Sergio Alcocer	Director of Research	Circuito Escolar Ciudad Universitaria, Institute of Engineering, UNAM	Mexico DF 4510, MEXICO	salcocerm@iingen.unam.mx